

# Residential Series

## Battery Storage System

FOR US MARKET



**Renon Power Technology Inc.**

© Renon Power Technology Inc. All Rights Reserved. Specifications are subject to change without notice.  
2024-08-19



# Renon Power

---

## We Care The Sustainability

With our own R&D team and automatic production factory, we are dedicated to delivering innovative, reliable, and affordable energy storage solutions to global customers.

At Renon, we believe that sustainable energy is the future. We are passionate about reducing carbon emissions and preserving our planet for future generations. That's why we invest heavily in research and development, leveraging the latest technologies to design and manufacture energy storage systems that are efficient, scalable, and adaptable.

Our products are designed to meet the needs of a wide range of applications, from residential and commercial buildings to industrial facilities and utility-scale projects. Whether you're looking to reduce your energy bills, increase your energy independence, or support your sustainability goals, Renon has the right solution for you.

Our commitment to quality and customer satisfaction is unwavering. We work closely with our clients to understand their unique needs and provide customized solutions that meet or exceed their expectations. We also provide comprehensive technical support, maintenance, and warranty services to ensure that our customers get the most out of their investment.

**JOIN US ON OUR MISSION TO MAKE GREEN POWER WITHIN REACH.**

---

**PROVIDE INNOVATIVE,  
RELIABLE, AND  
AFFORDABLE ENERGY  
STORAGE SOLUTIONS  
TO CUSTOMERS  
WORLDWIDE.**

---



# Content

Meeting the highest standards of quality and safety in the global market.

<b>Industry Application</b>	<b>01</b>
<b>Products</b>	<b>02</b>
<b>Solution</b>	<b>17</b>
<b>Renon CloudX</b>	<b>18</b>
<b>Installation Cases</b>	<b>20</b>
<b>Renon Exhibition</b>	<b>21</b>



# Industry Application

Renon's energy storage products are extensively applied across residential, commercial, and industrial sectors. With exceptional performance, cutting-edge technology, and efficient energy management, they provide reliable, innovative, and eco-friendly energy solutions, helping global users achieve their sustainability goals.



**Residential**  
Apartment



**Residential**  
Detached House



**Agriculture & Livestock**  
Farm & Ranch

**Commercial**  
Supermarket & Kiosk

**Commercial**  
Charging Station

**Commercial**  
Community



**Industrial**  
Manufactory

**Industrial**  
Supercomputing

**Industrial**  
Electricity Generating Station



As a company that values renewable energy, we are passionate about developing solutions that contribute to a greener, more sustainable future. Our products are designed to reduce carbon emissions and promote environmental conservation.

# Products Display

Featuring straightforward installation and flexible, scalable capacity, these products address a broad spectrum of home energy storage requirements.

## ■ LV Battery Storage System



P03  
Xtreme LV



P05  
Xcellent



P07  
Xcellent Plus



P09  
EBrick

## ■ HV Battery Storage System



P11  
Xtreme HV 2.1

## ■ One-Stop Solution



P13  
Sol-Ark 12K 2p



P15  
Sol-Ark 15K 2p



# Xtreme LV

## Modular LV Battery System

**Scalability:** The system can be expanded with up to 15 systems in parallel, offering flexibility and future-proofing for growing energy needs.

**High Efficiency:** Designed for peak shaving and self-consumption, it helps reduce energy bills by optimizing the use of solar power and minimizing reliance on the grid.

**Strong Compatibility:** The system is designed to work seamlessly with various inverters and energy management systems, providing flexibility in integration with existing setups.



**Comprehensive Warranty:** Backed by a 10-year warranty, the Xtreme LV system assures long-term peace of mind and protection for the investment.

**Wi-Fi Connectivity and APP Control:** Enables remote monitoring and management of the energy storage system through a dedicated mobile application, enhancing user convenience and control.



System Layout

### System Demonstration

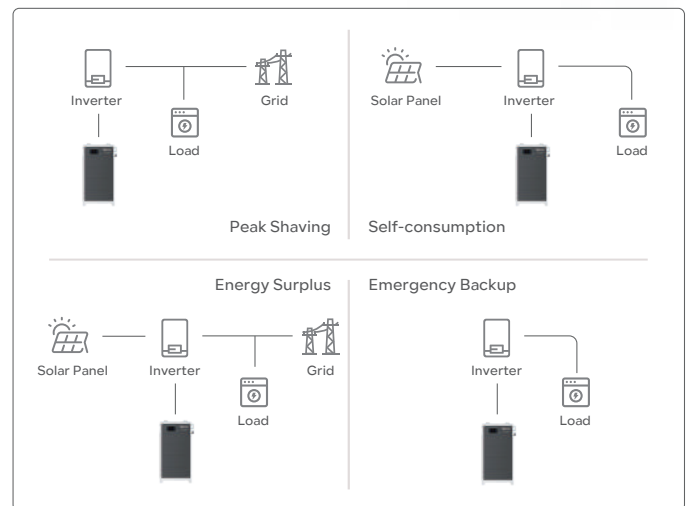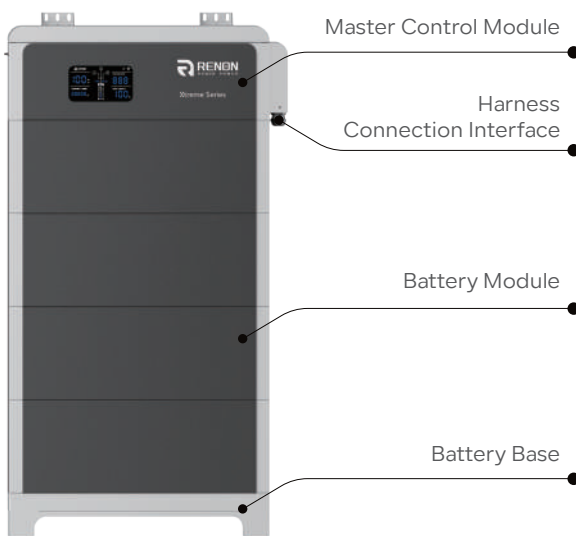

### Application Scenario




Battery Energy Storage(4.8/5.12V)	2 Modules	3 Modules	4 Modules	5 Modules	6 Modules
Nominal Energy (kWh)	9.6/10.24	14.4/15.36	19.2/20.48	24/25.6	28.8/30.72
Power(kW)	9.1/9.7	13.7/14.6	14.4/15.4	14.4/15.4	14.4/15.4
Max. Operation Current (A)	190	285	300	300	300
Peak for 10s (A)	196	297	392	490	500
Peak for 2s (A)	240	360	480	500	500
Max. Charging Voltage (Vdc)	54.75/58.4				
Discharge Cut-off (Vdc)	40.5/43.2				
Nominal Voltage (Vdc)	48/51.2				
Recommend Charging Voltage(Vdc)	53.25/56.8				
Dimension (W*D*H)	635*268*795mm 25*10.6*31.3in	635*268*1023mm 25*10.6*40.3in	635*268*1250mm 25*10.6*49.2in	635*268*1478mm 25*10.6*58.2in	635*268*1705mm 25*10.6*67.1in
Net Weight (Approximate)	139/141kg 306/311lb	192/194kg 423/428lb	245/247kg 540/545lb	298/300kg 656/661lb	351/353kg 773/778lb

General Parameters		System Characteristic	
Scalability	Max. 15 systems in parallel	Master Control Model	R-MC300-XTL01
Storage Conditions	-20°C ~ 55°C(0°C ~ 35°C Recommended) Up to 90%RH, non-condensing Initial SoC: 50%	Battery Model	R-EM51100-XTL01
Operating Temperature	Charge: 0°C ~ 50°C Discharge: -20°C ~ 50°C	Battery Compliances	UL1973,UL9540, UL9540A UKCA, IEC 62619, IEC62040 CEI 0-21, UN 38.3, EN-61000, EN-62311
Cooling	Natural Cooling	Installation Method	Stack Mounting
Max. Altitude	2000m / 6561ft	Installation Scene	Indoor or Outdoor
Cycle Life	8000 Cycles	IP Rating	IP65
Communication	RS485, CAN, WiFi	Warranty [1]	10 Years

[1] Please refer to the warranty letter for details

## Packaging & Shipping Details

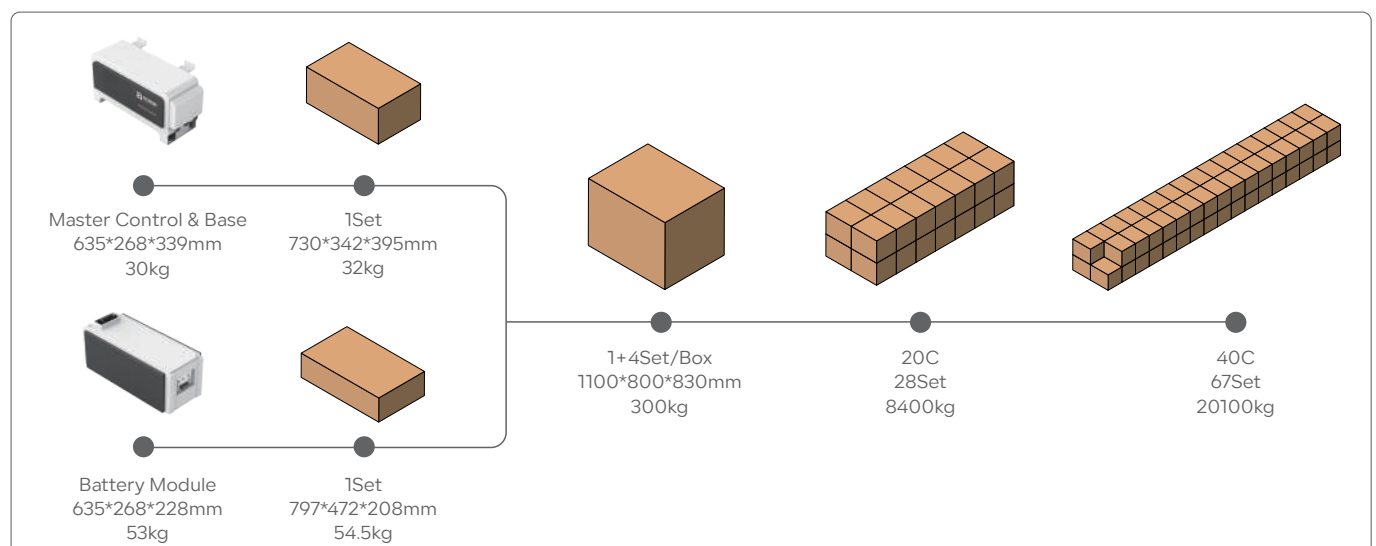

# Xcellent

## Wall-Mounted LV Battery System


**Safe and Stable LFP Technology:** The Xcellent series uses Lithium Iron Phosphate (LFP) battery chemistry, known for its safety, stability, and long lifespan, ensuring reliable performance.

**Minimalist and Compact Design:** The Xcellent batteries feature a minimalist, noise-free design that can be seamlessly integrated into various residential settings, both indoor and outdoor.


**High Compatibility and Flexibility:** The Xcellent series is designed to be highly compatible with various inverters and can be easily scaled to meet different energy storage needs, from small residential setups to larger installations.



### Product Details

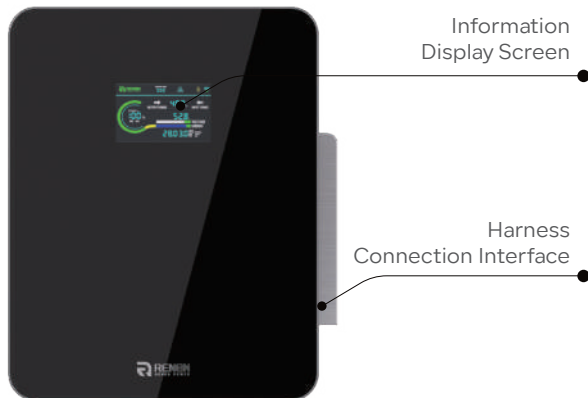

### System Layout

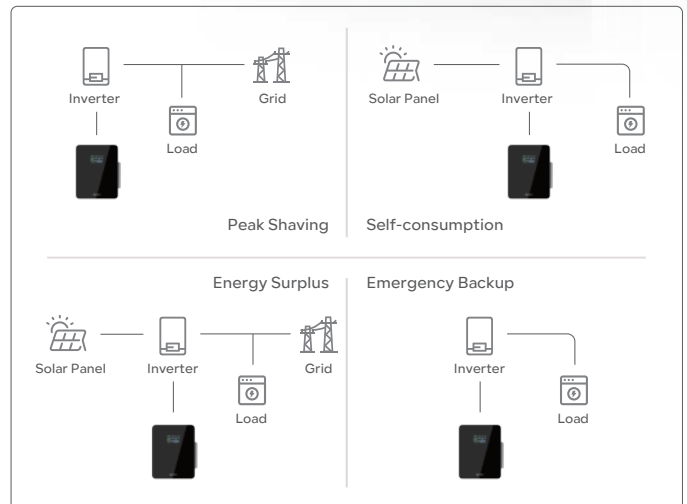

### Application Scenario






Battery Energy Storage	
Battery Chemistry	LiFePO4
Cell Capacity (Ah)	100
Nominal Energy (kWh)	5.12
Power(kW)	4.8
Default Voltage (V)	51.2
Voltage Range (V)	43.2 ~ 59.2
Max. Operation Current (A)	95
Primary Overcurrent Protection (A)	98@10S
Secondary Overcurrent Protection (A)	120@2S
Max. Charging Voltage (V)	58.4
Discharge Cut-off (V)	43.2
Recommended Charging Voltage (V)	56.8
Dimension (W*D*H)	480*170*570mm 18.9*6.7*22.4in
Net Weight (Approximate)	54kg 119lb

General Parameters	
Scalability	Max. 31 systems in parallel
Storage Conditions	-20°C ~ 55°C(0°C ~ 35°C Recommended) Up to 90%RH, non-condensing Initial SoC: 50%
Operating Temperature	Charge: 0°C ~ 50°C Discharge: -20°C ~ 50°C
Cooling	Natural Cooling
Max. Altitude	2000m / 6561ft
Cycle Life	8000 Cycles
Communication	RS485, CAN, WiFi

System Characteristic	
Battery Model	R-XC005161
Battery Compliances	IEC 62619, UN 38.3, UL1973 UKCA, CEI 0-21, EN-62311, EN-61000
Installation Method	Wall-Mounting
Installation Scene	Indoor
IP Rating	IP20
Warranty [1]	10 Years

[1] Please refer to the warranty letter for details

## ■ Packaging & Shipping Details

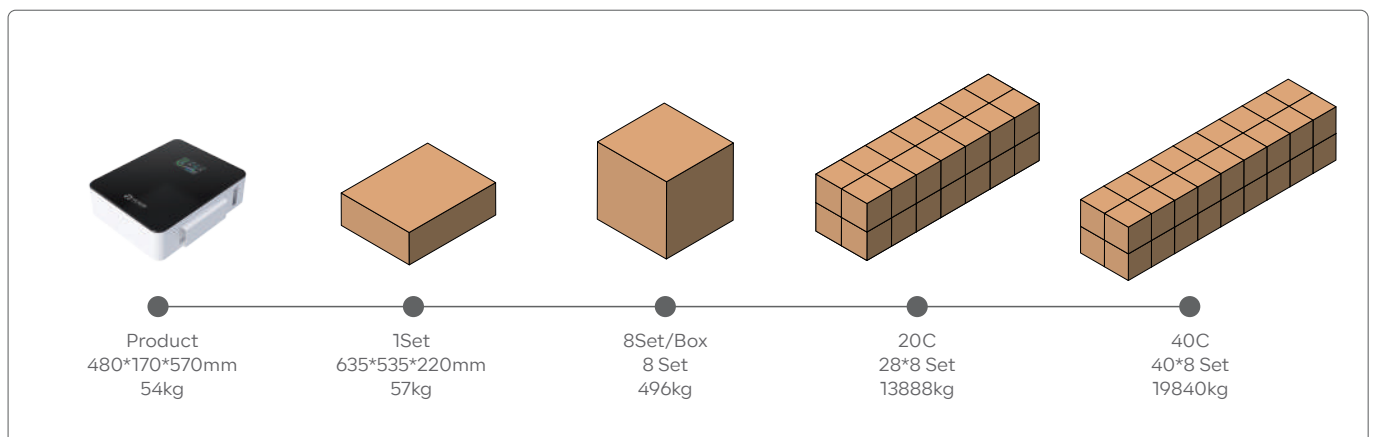

# Xcellent Plus

## Wall-Mounted LV Battery System

**Dependable Safety:** Designed with a high level of safety features, including dependable lithium iron phosphate (LiFePO4) technology, ensuring safe and stable operation.

**Sleek Aesthetics:** Modern and sleek design that integrates seamlessly into residential environments, enhancing the aesthetic appeal of installation areas.


**Whisper-Quiet Operation:** Engineered for silent operation, making it ideal for home settings where noise levels need to be minimal.

**Versatile Compatibility:** Compatible with various inverters and energy systems, allowing for flexible integration with existing home energy setups.


**Long Cycle Life:** Offers an impressive cycle life of up to 8000 cycles, providing long-term reliability and cost-effectiveness.



### Product Details

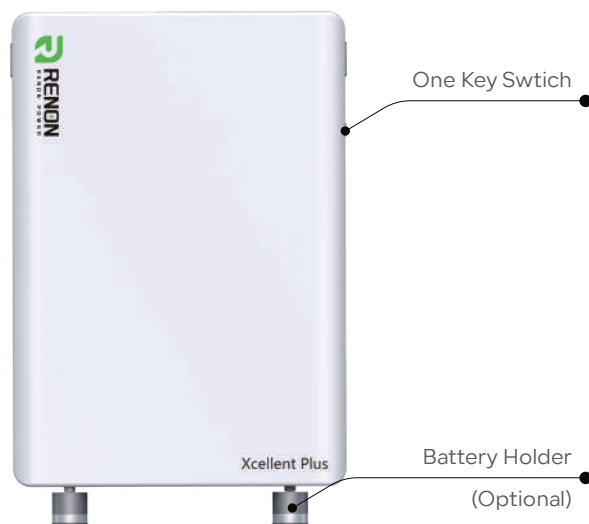

### System Layout

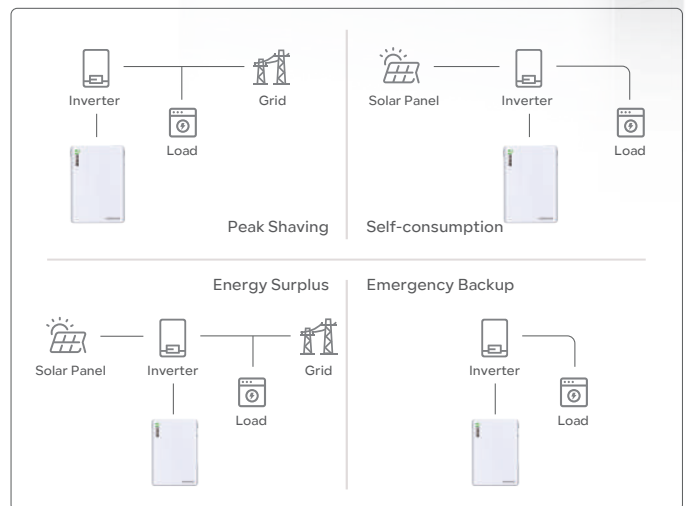

### Application Scenario



## Battery Energy Storage

Battery Chemistry	LiFePO4
Cell Capacity (Ah)	314
Nominal Energy (kWh)	16
Power (kW)	10.2
Default Voltage (V)	51.2
Voltage Range (V)	43.2 ~ 59.2
Max. Operation Current (A)	200
Primary Overcurrent Protection (A)	210@10S
Secondary Overcurrent Protection (A)	250@500mS
Max. Charging Voltage (V)	58.4
Discharge Cut-off (V)	43.2
Recommended Charging Voltage (V)	56.8
Dimension (W*D*H)	560*200*800mm 22*7.8*31.5in
Net Weight (Approximate)	110kg 242lb

## General Parameters


Scalability	Max. 15 systems in parallel
Storage Conditions	-20°C ~ 55°C(0°C ~ 35°C Recommended) Up to 90%RH, non-condensing Initial SoC: 50%
Operating Temperature	Charge: 0°C ~ 50°C Discharge: -20°C ~ 50°C
Cooling	Natural Cooling
Max. Altitude	2000m / 6561ft
Cycle Life	8000 Cycles
Communication	RS485, CAN, WiFi

## System Characteristic

Battery Model	R-XC016161
Battery Compliances	IEC 62619, UN 38.3, CEI 0-21, EN-61000
Installation Method	Wall-Mounting or Floor Mounting
Installation Scene	Indoor or Outdoor
IP Rating	IP55
Warranty [1]	10 Years

[1] Please refer to the warranty letter for details

## ■ Packaging & Shipping Details

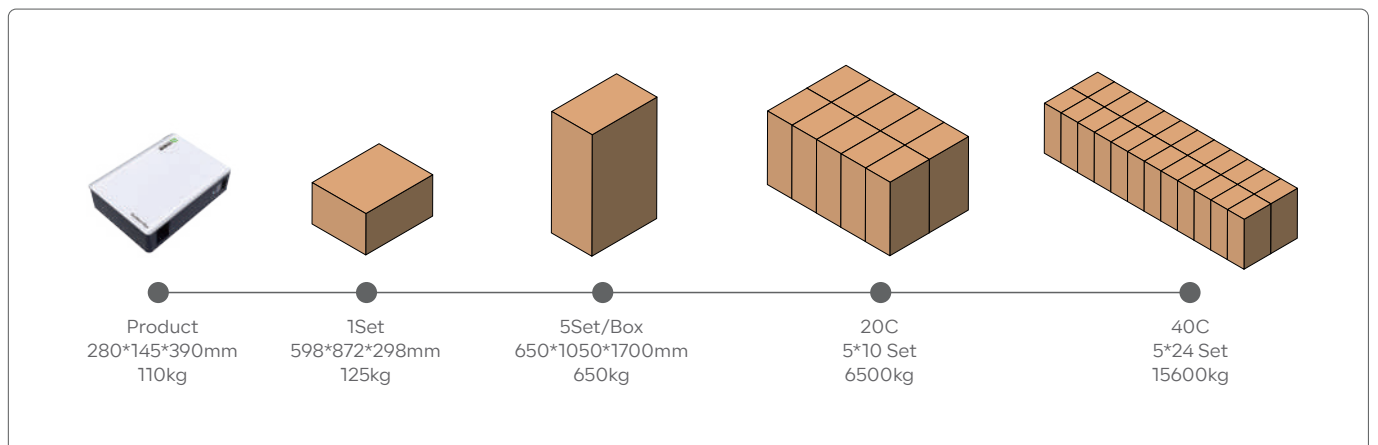

# EBrick

## Rack Mounted LV Battery System


**Modular Design and Easy Installation:** EBrick's rack-mount design allows for customizable and simple installation, with the flexibility to connect multiple units in parallel. This reduces installation time and costs.

**Wi-Fi Connectivity and App Control:** EBrick features Wi-Fi connectivity, enabling users to remotely monitor and control the system via a dedicated app. This enhances user experience with real-time monitoring and efficient system management.


**Stable LiFePO4 Battery Technology:** EBrick uses reliable lithium iron phosphate (LiFePO4) batteries, offering up to 8000 cycles. Its efficient battery management system ensures high performance and safety.



### Product Details

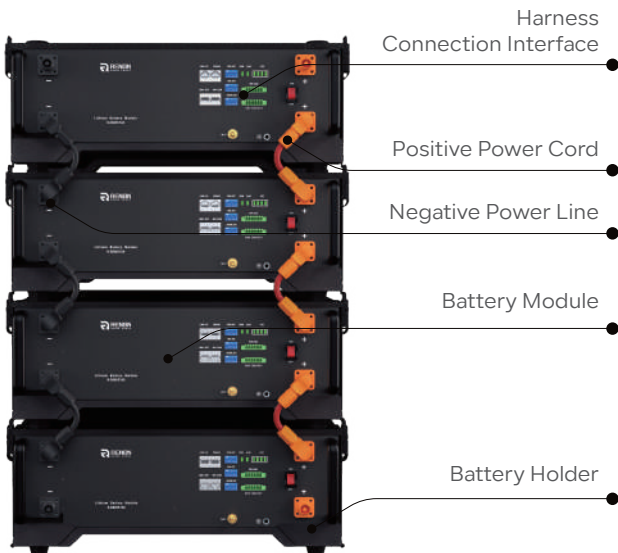

### System Layout

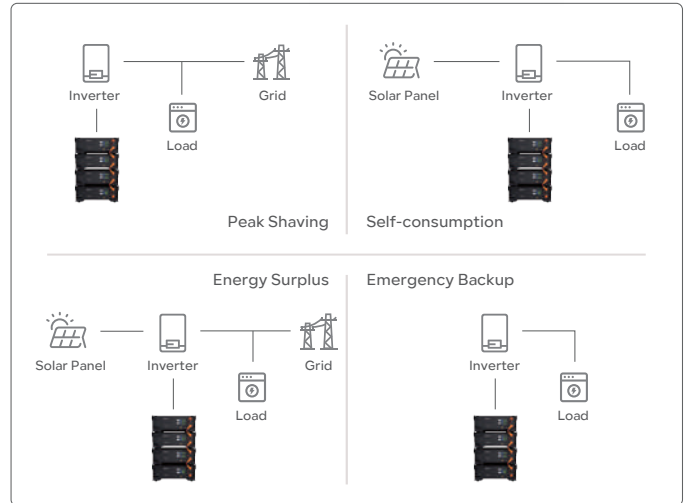

### Application Scenario




Battery Energy Storage	
Battery Chemistry	LiFePO4
Cell Capacity (Ah)	100
Nominal Energy (kWh)	5.12
Power (kW)	4.8
Default Voltage (V)	51.2
Voltage Range (V)	43.2 ~ 59.2
Max. Operation Current (A)	95
Primary Overcurrent Protection (A)	98@10S
Secondary Overcurrent Protection (A)	120@30mS
Max. Charging Voltage (V)	58.4
Discharge Cut-off (V)	43.2
Recommended Charging Voltage (V)	56.8
Dimension (W*D*H)	440*420*132mm 17.3*16.5*5.2in
Net Weight (Approximate)	45kg 99.2lb

General Parameters	
Scalability	Max. 31 systems in parallel
Storage Conditions	-20°C ~ 55°C(0°C ~ 35°C Recommended) Up to 90%RH, non-condensing Initial SoC: 50%
Operating Temperature	Charge: 0°C ~ 50°C Discharge: -20°C ~ 50°C
Cooling	Natural Cooling
Max. Altitude	2000m / 6561ft
Cycle Life	8000 Cycles
Communication	RS485, CAN, WiFi

System Characteristic	
Battery Model	R-EB005161
Battery Compliances	UL1973, UL9540A, IEC 62619, UN 38.3 CEI 0-21, UKCA, EN-61000, EN-62311
Installation Method	Rack Mounting
Installation Scene	Indoor
IP Rating	IP20
Warranty [1]	10 Years

[1] Please refer to the warranty letter for details

## ■ Packaging & Shipping Details

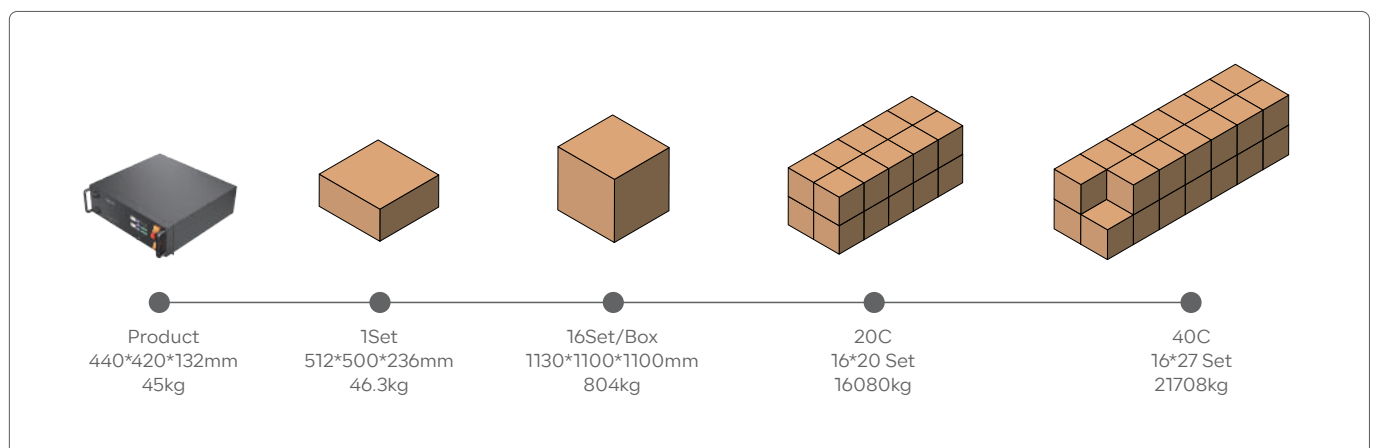

# Xtreme HV 2.1


## Modular HV Battery System

**Enhanced Efficiency and Scalability:** The voltage range of 367.2–496.4V reduces transmission losses, and its modular design supports stacking of 2 to 6 modules, ensuring high operational reliability with dynamic current equalizing techniques.


**Advanced Smart Management:** Features such as one-key start, built-in battery optimizer, and wireless design with Wi-Fi connectivity allow for easy activation, unified management, and real-time monitoring and fault pre-warning.

**Superior Safety and Durability:** With a built-in battery optimizer, up to 8000 cycle life, IP55 protection rating, and comprehensive certifications, the system ensures long-term stable operation and global safety compliance.


**User-Friendly Integrated Solutions:** The system supports seamless integration with various components and a 10-year warranty, enhancing user confidence and satisfaction.

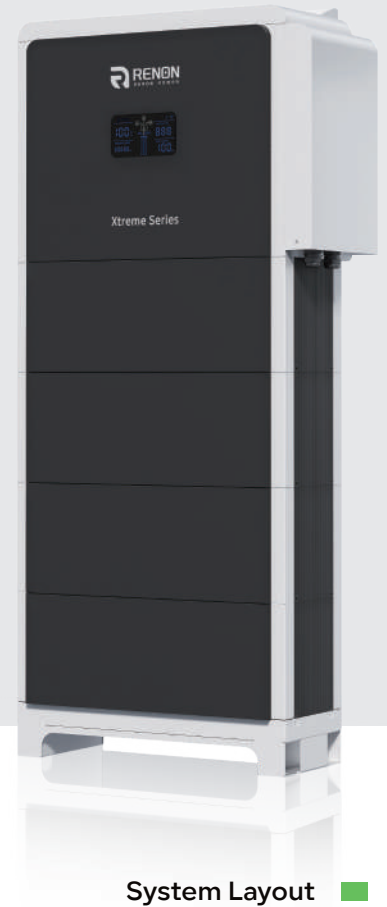

### Product Details

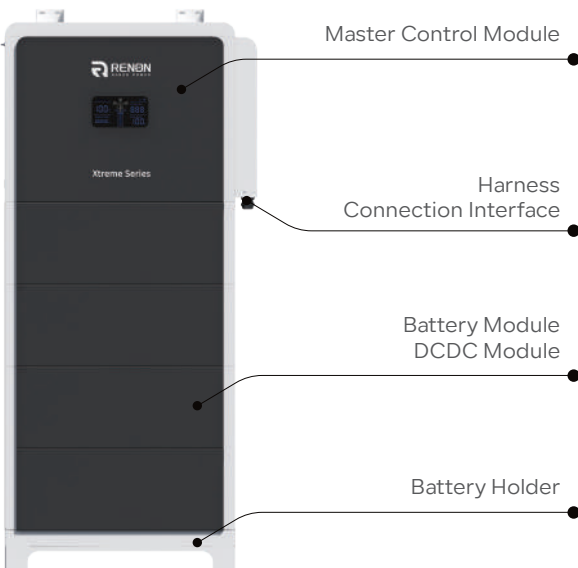

### System Layout

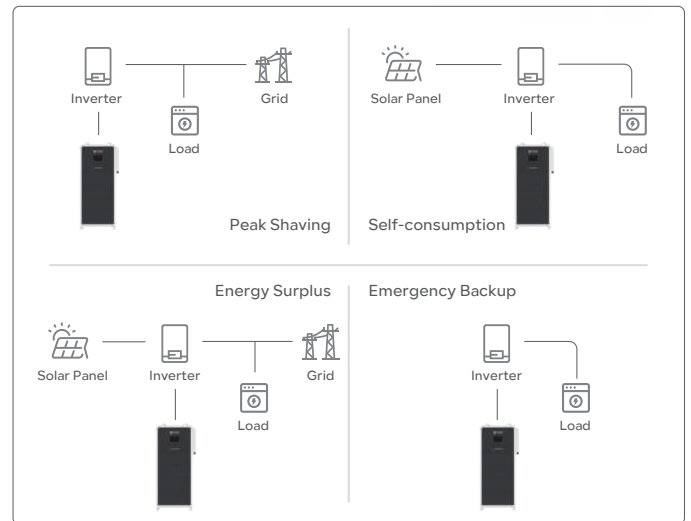

### Application Scenario




Battery Energy Storage	2 Modules	3 Modules	4 Modules	5 Modules	6 Modules
Battery Combination			1P16S		
Battery Modular Capacity (Ah)			100		
Nominal Energy (kWh)	10.24	15.36	20.48	25.6	30.72
Power (kW)	13	19.6	19.6	19.6	19.6
Default Voltage (V)			435.2		
Settable Voltage Range (V)			367.2~496.4		
Nominal Current (A)	25	37.5	37.5	37.5	37.5
Max. Current (A)@10S	30	45	45	45	45
Dimensions (W*D*H)	735*400*775.5mm 29*15.7*30.5in	735*400*911mm 29*15.7*35.8in	735*400*1046.5mm 29*15.7*41.2in	735*400*1317.5mm 29*15.7*51.8in	735*400*1453mm 29*15.7*57.2in
Total Weight	160kg 353lb	209kg 461lb	257kg 567lb	306kg 675lb	355kg 783lb

General Parameters		System Characteristic	
Scalability	Max. 15 cluster in parallel	Master Control Model	R-EM51100-XTL01
Storage Conditions	-20°C ~ 55°C(0°C ~ 35°C Recommended) Up to 90%RH, non-condensing Initial SoC: 50%	Battery Model	R-PDO15-XTH01
Operating Temperature	Charge: 0°C ~ 50°C Discharge: -20°C ~ 50°C	Installation Method	Stack Mounting
Cooling	Natural Cooling	Installation Scene	Indoor or Outdoor
Max. Altitude	2000m / 6561ft	IP Rating	IP55
Cycle Life	8000 Cycles	Warranty [1]	10 Years
Communication	RS485, CAN, WiFi		

[1] Please refer to the warranty letter for details

## Packaging & Shipping Details

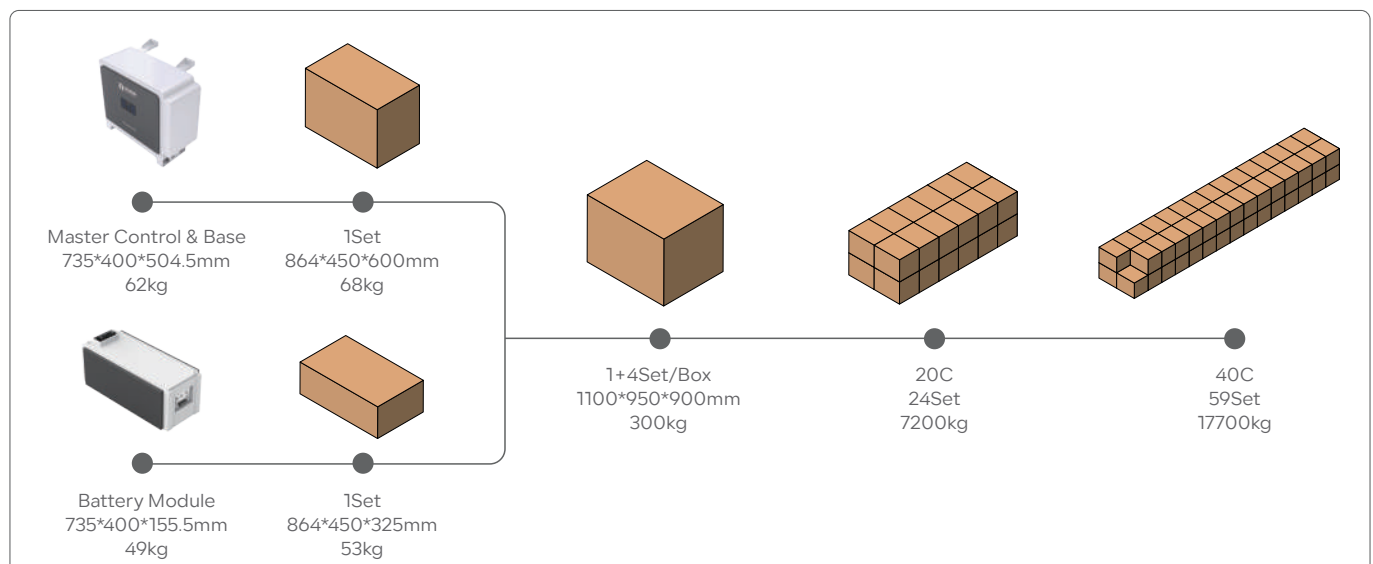

# Sol-Ark 12K-2P

## LV Split-phase Hybrid Inverter

**Partial Home Backup:** Ensure your essential home appliances stay powered during outages, maintaining comfort and convenience.

**Built-In Transfer Switch:** Simplify your solar energy system installation with an integrated transfer switch, seamlessly compatible with any AC power source.


**Battery Agnostic:** Enjoy unparalleled flexibility with compatibility across all 48V batteries on the market.

**Military-Grade Reliability:** Opt for up to twice the military-grade protection, guaranteeing operation even during lightning strikes and other extreme conditions.


**EV Home Charging:** Power your electric vehicle efficiently with dedicated circuit loading for hassle-free home charging.



### Product Details

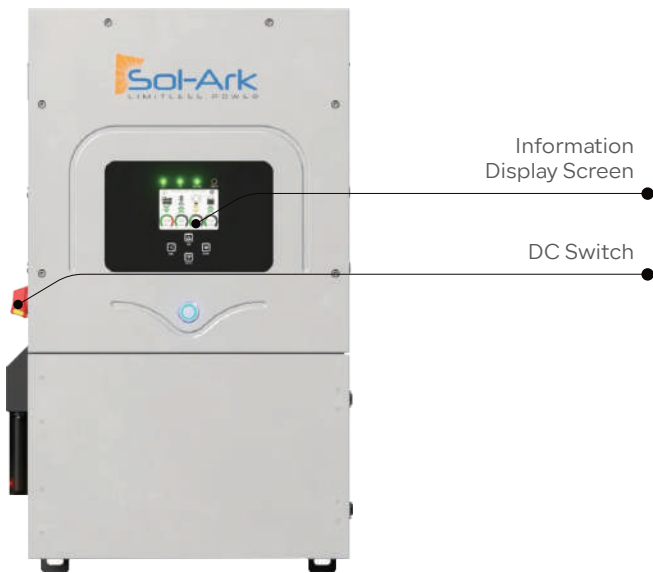

### System Layout

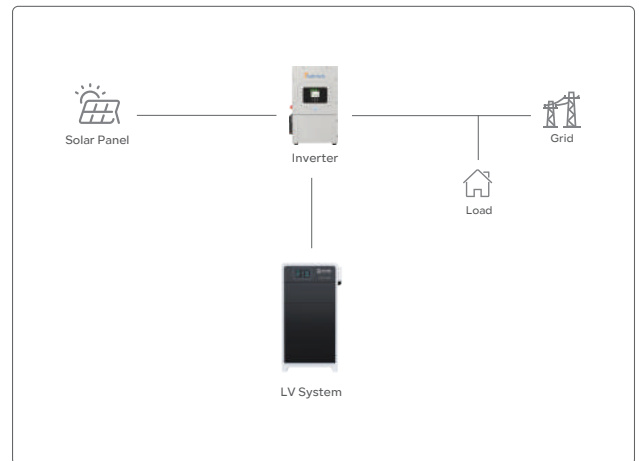

### Application Scenario





PV Input	
Max. Allowed PV Power(kW)	13
Rated MPPT Operating Voltage Range(V)	175 ~ 425
MPPT Voltage Range(V)	150 ~ 500
Startup Voltage(V)	125
Max. Input Voltage 1(V)	500
Max. Operating Input Current per MPPT(A)	20(self-limiting)
No. of MPP Trackers	2
No. of PV Strings per MPPT	2
Max. AC Coupled Input(kW)	9.6

AC Output	
Nominal AC Voltage(V)	120/240, 120/208, 220
Grid Frequency(Hz)	50 / 60
Real Power, max continuous 2(kW)	9
Max. Output Current(A)	37.5
Peak Apparent Power(kVA)(10s, off-grid)	16@240V
Peak Apparent Power(kVA)(100ms, off-grid)	25@240V
Max Output Fault Current(A)(100ms)	104
Max. Grid Passthrough Current(A)	63
Power Factor Output Range	± 0.9 adjustable
Backup Transfer Time	4ms
CEC Efficiency	96.5%
Max Efficiency	97.5%
Design (DC to AC)	Transformerless DC
Stackable	Up to 9 in parallel



Battery Input	
Battery Technologies	Lithium / Lead Acid
Nominal DC Voltage(V)	48
Operating Voltage Range(V)	43 ~ 63
Capacity(Ah)	50 ~ 9900
Max. Battery Charge / Discharge Current(A)	185
Charging Controller	3-Stage with Equalization
Grid to Battery Charging Efficiency	96.0%
External Battery Temperature Sensor (BTS)	Included
Automatic Generator Start (AGS)	2 Wire Start - Integrated
BMS Communication	CANBus, RS485 MODBUS

General Parament	
Inverter Model	Sol-Ark-12K-P
Dimensions (W*D*H)	450*254*750mm/17.7*10*29.5in
Weight	35.4kg / 78lb
Enclosure	IP65 / NEMA 3R
Ambient Temperature	-25~55°C(>45°C Derating)
Noise	< 30 dB @ 25°C (77°F)
Idle consumption - No Load(W)	60
Communication and Monitoring	Wi-Fi & LAN Hardware Included
Standard Warranty	10 Years

Protection & Certifications	
Certifications and Listings	UL1741-2010/2018 IEEE1547a 2003/2014 FCC 15 Class B, UL1741SB CA Rule 21, HECO Rule 14H
PV DC Disconnect Switch — NEC 240.15	Integrated
Ground Fault Detection — NEC 690.5	Integrated
PV Rapid Shutdown Control — NEC 690.12	Integrated
PV Arc Fault Detection — NEC 690.11	Integrated
PV Input Lightning Protection	Integrated
PV String Input Reverse Polarity Protection	Integrated
AC Output Breaker - 63A	Integrated
250A Battery Breaker / Disconnect	Integrated
Surge Protection	DC Type II / AC Type II

# Sol-Ark 15K-2P

## LV Split-phase Hybrid Inverter

**Grid Down Generation:** Continue generating power independently from the grid during prolonged power outages or blackouts. Never have to worry about how full your generator fuel tank is or manage run-times.

**No Operating Cost:** Minimal to no operating or maintenance costs. Most user-friendly method of backing up household loads.


**DC to DC Architecture:** Maximize your battery efficiency with DC-to-DC architecture. Your same kWh batteries last longer.

**2\* Military-Grade Reliability Option:** Exceeds military-grade standards to keep working through lightning strikes and other military-grade weapons.


**EV Home Charging:** Charge your electric vehicle with the ability to load a single circuit.



### Product Details

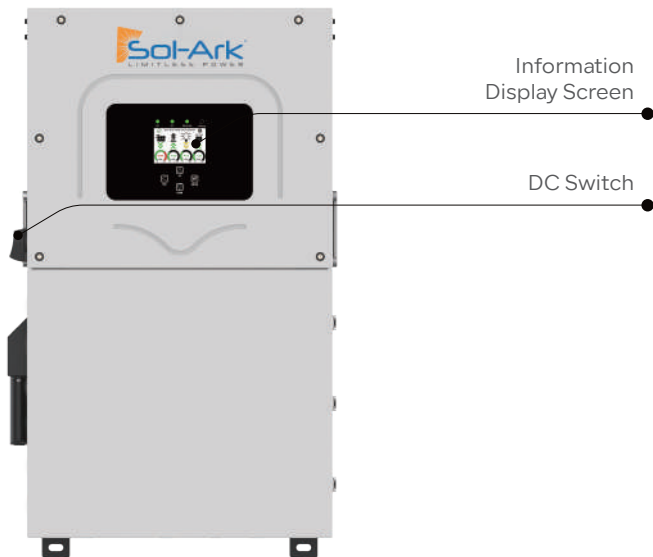

### System Layout

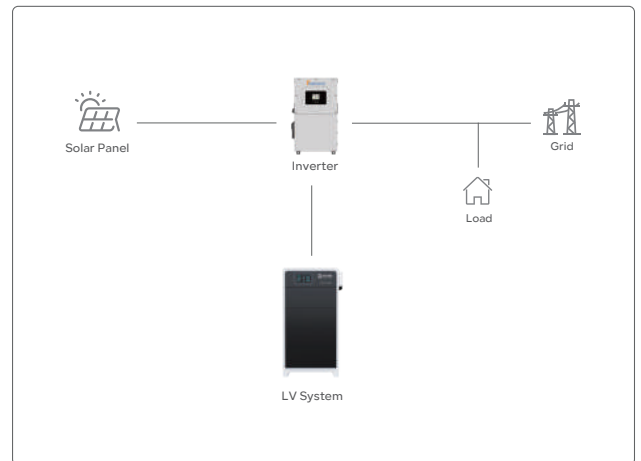

### Application Scenario



PV Input	
Max. Allowed PV Power(kW)	19.5
Rated MPPT Operating Voltage Range(V)	175 ~ 425
MPPT Voltage Range(V)	150 ~ 500
Startup Voltage(V)	125
Max. DC Input Voltage 1(V)	500
Max. Operating Input Current per MPPT(A)	26
Max. Short Circuit Current per MPPT(A)	44
No. of MPP Trackers	3
No. of PV Strings per MPPT	2
Max. AC Coupled Input(kW)	19.2
AC Output	
Nominal AC Voltage(V)	120/240, 120/208, 220
Grid Frequency(Hz)	50 / 60
Real Power, max continuous(kW)	15
Max. Output Current(A)	62.5
Real Power, max continuous(kW)(batteries only)	12(50A @ 240V)
Peak Apparent Power(kVA)(10s, off-grid)	24@240V
Peak Apparent Power(kVA)(100ms, off-grid)	30@240V
Max Output Fault Current(A)(5s)	94(with PV), 75(batteries only)
Max Output Fault Current(A)(100ms)	120
Max. Grid Passthrough Current(A)	200
Power Factor Output Range	±0.9 adjustable
Backup Transfer Time	5ms
CEC Efficiency	96.5%
Max Efficiency	97.5%
Design (DC to AC)	Transformerless DC
Stackable	Up to 12 in parallel



Battery Input	
Battery Technologies	Lithium / Lead Acid
Nominal DC Voltage(V)	48
Operating Voltage Range(V)	43 ~ 63
Capacity(Ah)	50 ~ 9900
Max. Battery Charge / Discharge Current(A)	275
Battery Disconnecting Means(A)	200/pole*2
Charging Controller	3-Stage with Equalization
Grid to Battery Charging Efficiency	96.0%
External Battery Temperature Sensor (BTS)	Included
Automatic Generator Start (AGS)	2 Wire Start - Integrated
BMS Communication	CANBus, RS485 MODBUS

General Parament	
Inverter Model	Limitless 15K-LV
Dimensions (W*D*H)	494*306*807mm / 19.4*12*31.8in
Weight	61.2kg / 135lb
Enclosure	IP65 / NEMA 3R
Ambient Temperature	-25~55°C(>45°C Derating)
Noise	< 30 dB @ 25°C (77°F)
Idle Consumption - No Load(W)	90
Communication and Monitoring	Wi-Fi & LAN Hardware Included
Standard Warranty	10 Years


Protection & Certifications	
Certifications and Listings	UL1741-2010/2018 IEEE1547a 2003/2014 FCC 15 Class B, UL1741SB CA Rule 21, HECO Rule 14H
PV DC Disconnect Switch — NEC 240.15	Integrated
Ground Fault Detection — NEC 690.5	Integrated
PV Rapid Shutdown Control — NEC 690.12	Integrated
PV Arc Fault Detection — NEC 690.11	Integrated
PV Input Lightning Protection	Integrated
PV String Input Reverse Polarity Protection	Integrated
AC Output Breaker - 200A	Integrated
Surge Protection	DC Type II / AC Type II

# Solution

## LV Solution

### Low Voltage Energy Storage for Everyday Needs


Residential LV solutions offer dependable and affordable energy storage for everyday household needs. Ideal for small to medium-sized homes, these low voltage systems provide continuous power supply, enhancing energy independence and reducing electricity costs.

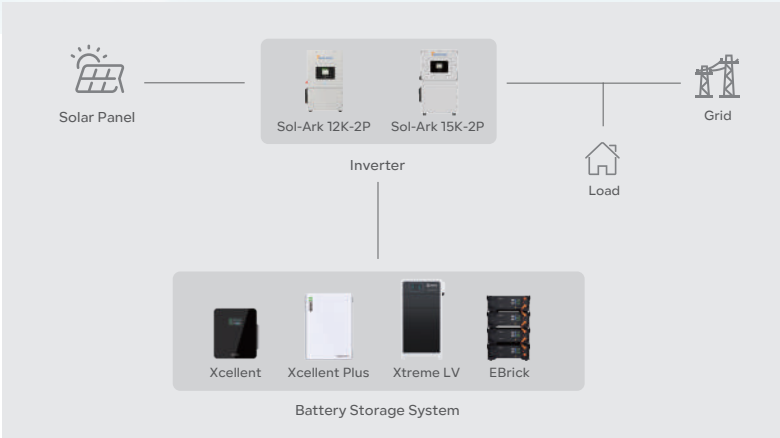

## HV Solution

### High Voltage Energy Storage for Modern Homes

Residential HV solutions deliver robust and reliable energy storage, designed for larger homes with higher energy demands. These high voltage systems provide efficient power management, ensuring your home remains powered through peak usage times and outages.

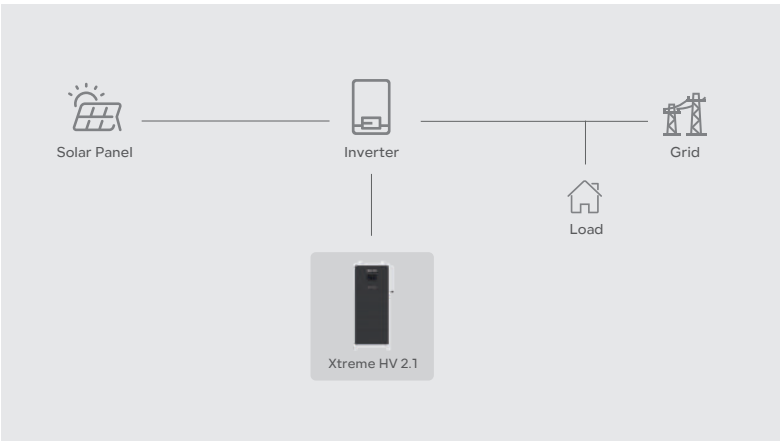


# Renon ColudX

## Cloud Energy Management

**We' re Using Smart Power to Simplify Your Life.**

Renon Smart is a comprehensive device management and monitoring solution for national agents, secondary agents, installers and users. Comprehensive system for managing large-scale power station and commercial and industrial energy storage systems

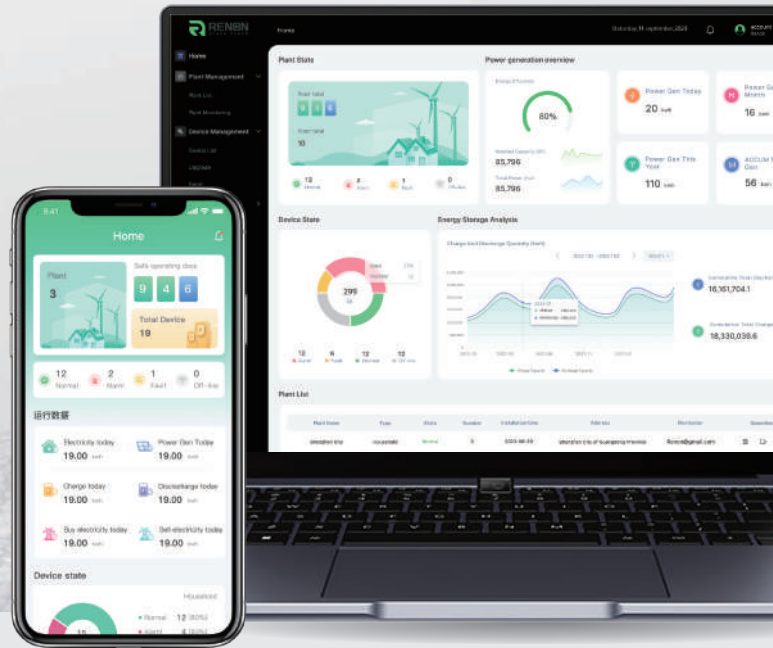

### Features



#### Instant Clarity with Remote Data Monitoring and Analysis

Remote data monitoring, automatic curve generation, and big data analysis management make the product operation status clear at a glance.



#### Enhanced Security with Distributed Architecture and Data Encryption

Distributed architecture deployment and data security encryption ensure that cloud data is more secure and reliable.



#### Seamless Connections with Intelligent Mall and Trial Applications

Intelligent mall application and new product trial application enable users to contact source manufacturers directly, making product promotion faster and more accurate.



#### Boost Customer Satisfaction with Remote Firmware Upgrades


Remote firmware upgrading and intelligent operation and maintenance report generation effectively improve customer satisfaction.




#### Optimized Channel Construction with a Six-Level Distribution System

The six-level distribution system, from the brand owner to end-users, is more conducive to robust product channel construction.


### Interface Showcase

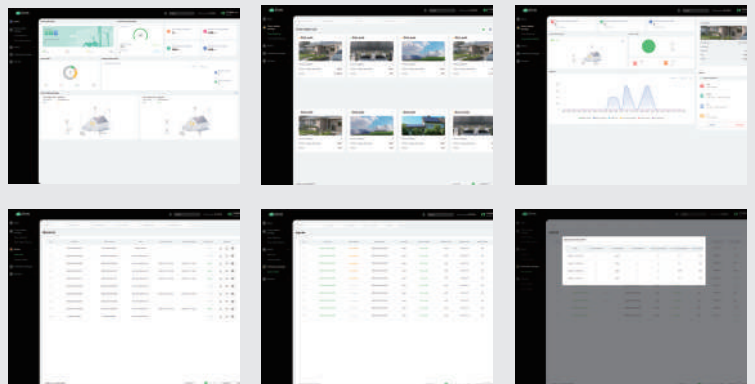

## Physical Link

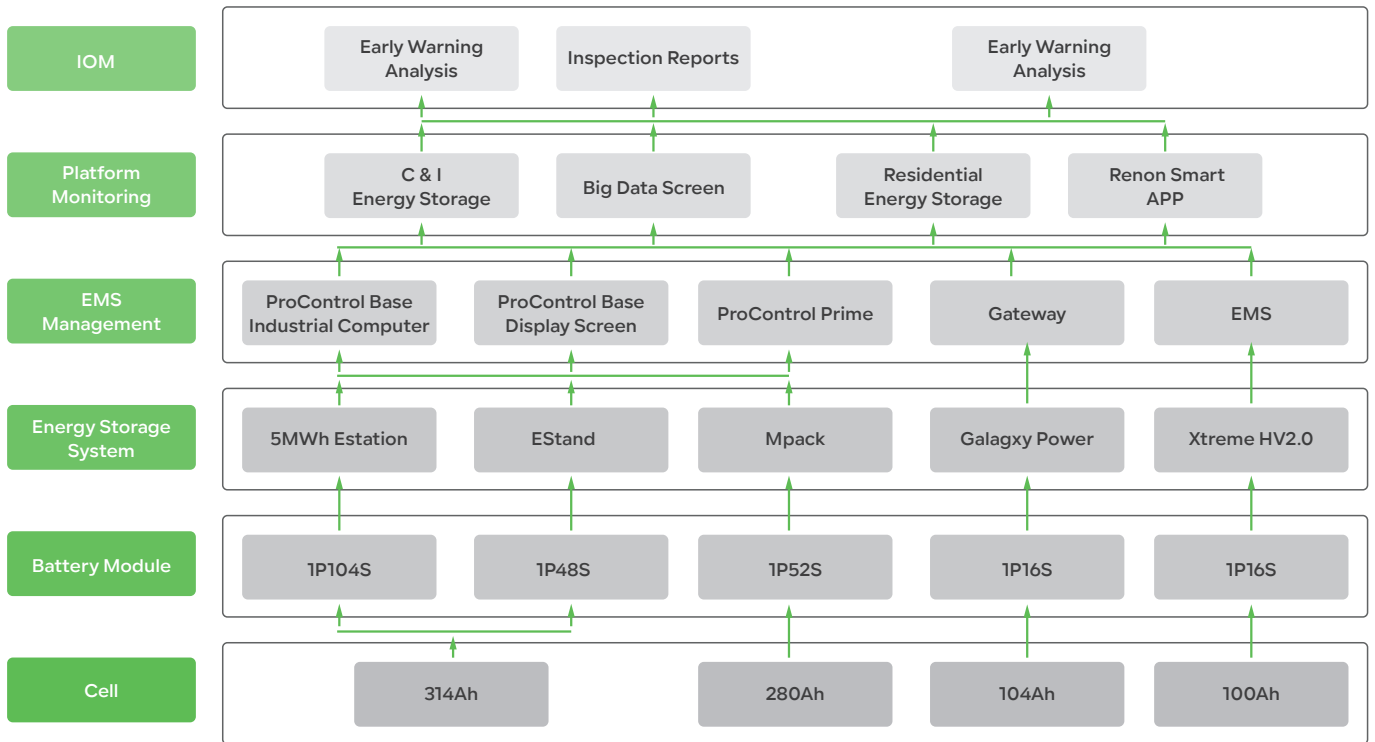

## Platform Architecture

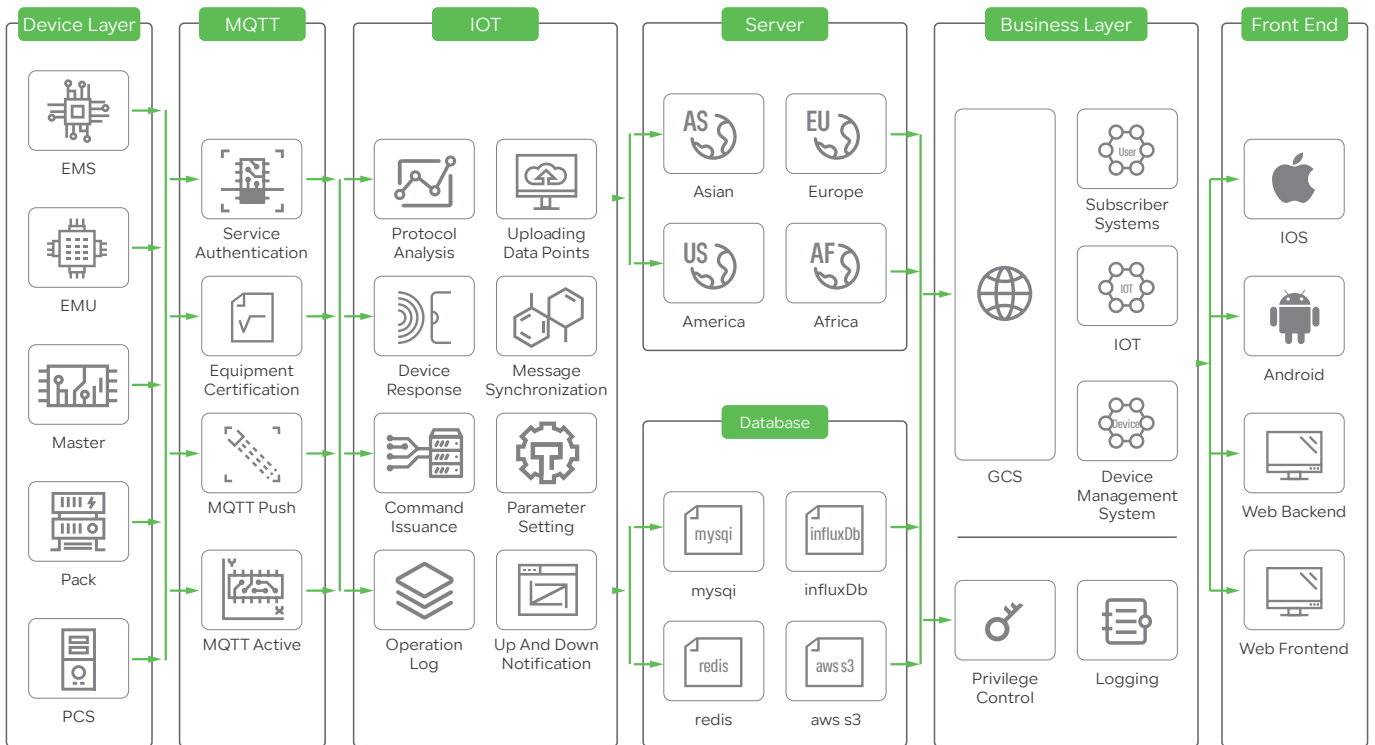

# Installation Cases

"As an installer, I appreciate the reliability and efficiency of Renon Power's solutions. Their technical support team is always available to assist with any questions or challenges, ensuring a smooth installation process from start to finish."

- Samantha J., Electrical Contractor



Lithuanian Xtreme LV



Germany EBrick



South Africa Xcellent



Italy Xcellent



Italy Xcellent



Italy Xcellent



Italy Xcellent



Portugal Ebrick



South Africa Xcellent




South Africa Xtreme LV



Netherlands Xcellent



South Africa Xtreme LV



South Africa Xtreme LV



South Africa Xtreme LV



South Africa Xcellent



South Africa Ebrick



USA Xtreme LV



USA Xtreme LV



USA Xtreme LV


# Renon Exhibition

At Renon Power, our team is our greatest asset.

We are a diverse group of passionate professionals, united by a shared mission to make green power within reach.

## Intersolar Europe 2023

Germany

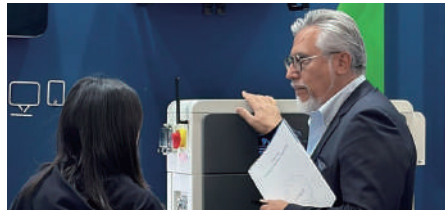


## Energy Storage Summit Central Eastern Europe

Eastern Europe



## RE Plus 2023

The United States

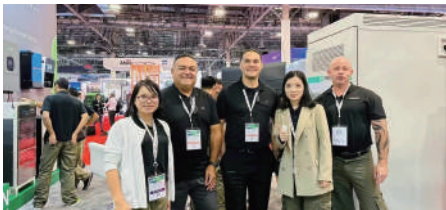

## EnerGaia 2023

French



## PV EXPO 2024 Tokyo

Japan







PROVIDE  
INNOVATIVE,  
RELIABLE, AND  
AFFORDABLE  
ENERGY STORAGE  
SOLUTIONS TO  
CUSTOMERS  
WORLDWIDE.



# Note Book

---

PROVIDE  
 INNOVATIVE,  
 RELIABLE, AND  
 AFFORDABLE  
 ENERGY STORAGE  
 SOLUTIONS TO  
 CUSTOMERS  
 WORLDWIDE.




---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---




---



---



---

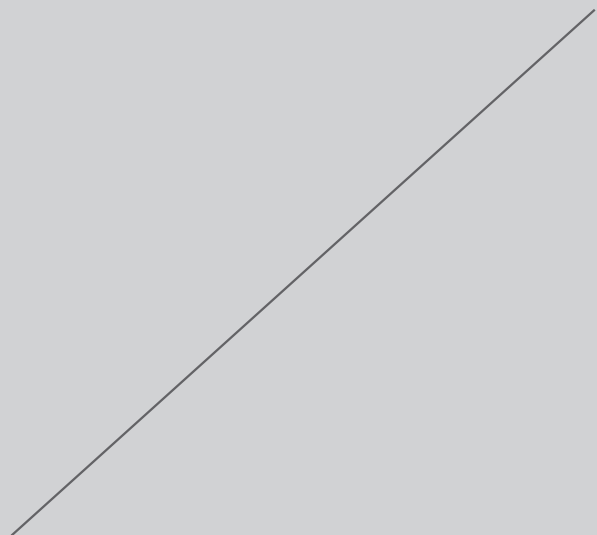

---

## Renon Power Technology Inc.

5900 Balcones Drive Suite 100, Austin, TX 78731 USA

---

## Renon Power Solutions Sp.z o.o.

ul. ELBLĄSKA 1, 93-459, ŁÓDŹ, POLAND

---

## Renon Power Technology B.V.

Rietbaan 10, 2908 LP Capelle aan den IJssel

---

## Renon Power 株式会社

東京都中央区日本橋箱崎町 20-5 VORT 箱崎 5F

---

## 瑞智新能源（惠州）有限公司

广东省惠州市惠阳区三和街道下桥背康易工业园



Whatsapp



Linkedin



Website